



Override Switch.

EV-HE077

The switch provides local override control of the smoke vent and head of stair vent with visual and audible indication.



KEY INFO / SPECIFICATIONS

Cable Entry	Rear
Connection	3 Wire to interface panel
IP Rating	IP42
Supply	24VDC, 32mA
Finish	ABS plastic RAL 2011 orange
Dimensions	H:125mm x W:125mm x D:35mm
Weight	0.25kg

HOW IT WORKS

Two buttons provide override open, close, firefighting and reset functions. Three coloured LEDs and an audible buzzer indicate system OK, fault and alarm status.

LOCATION

The override switch is connected directly to the local interface panel and should be located at the firefighter's place of safety such as the stairwell adjacent to the lobby entrance.

CASING

The hinged door is secured by a common key lock to prevent tampering and has a frangible break-glass element for emergency use.

MANUFACTURER

SIMON PROtec


CONFORMITY


UKCA & CE Marked to prEN 12101-9 BS ISO 21927-9

SUITABLE FOR:



TECHNICAL DRAWINGS



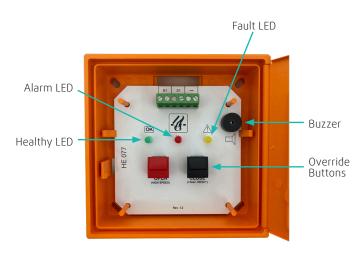

ACCESSORIES

Part numberProduct nameEV-HE077-SV-ORGOverride switch orange

SPARE PARTS

Part number	Product name
E10014	Replacement break-glass pane
E10019	Spare key

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

Group SCS reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Group SCS to be a complete and up-to-date description. For further information visit www.groupscs.co.uk