

Maintenance Switch.

EV-HE077

Tamper-proof switch for testing and monitoring smoke control systems.



HOW IT WORKS

Two buttons provide override open, close and reset functions and three coloured LEDs with an audible buzzer indicate system health, fault and alarm status.

LOCATION

The override switch should be located within a secure area for maintenance use only and is wired directly to the interface panel.

CASING

The hinged door is secured by a common key lock to prevent tampering.

MANUFACTURER

SIMON PROtec

CONFORMITY



UKCA & CE Marked

KEY INFO / SPECIFICATIONS

Cable Entry	Rear
Connection	3 Wire to interface panel
IP Rating	IP42
Supply	24VDC, 32mA
Finish	ABS plastic RAL 9010 white
Dimensions	H:125mm x W:125mm x D:35mm
Weight	0.25kg

SUITABLE FOR:



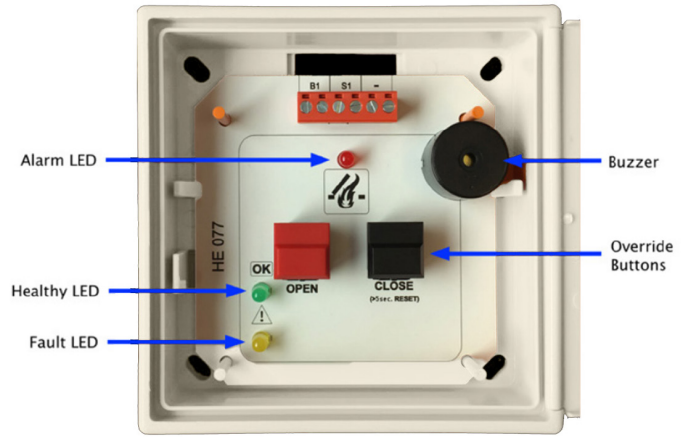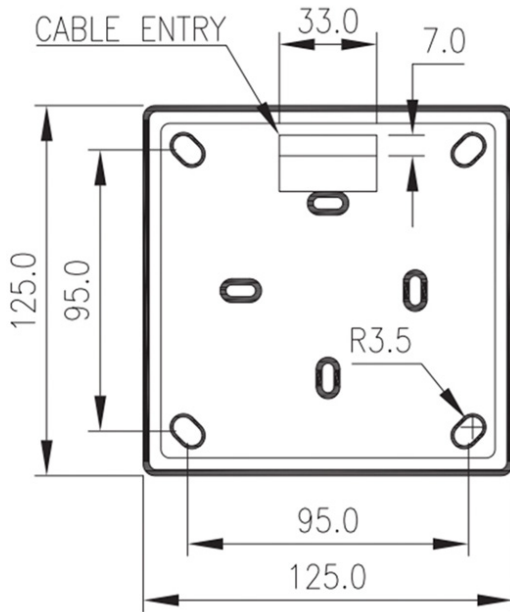

ACCESSORIES

Part number	Product name
EV-HE077-WHT	Maintenance switch white

SPARE PARTS

Part number	Product name
E10014	Replacement break-glass pane
E10019	Spare key

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

Group SCS reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Group SCS to be a complete and up-to-date description. For further information visit www.groupscs.co.uk