


EV-HMI12 User Interface Panel.

EV-HMI12E-DC

The HMI12 user interface panel provides monitoring, diagnostics and override control of the damper control system via a 12-inch colour touchscreen.

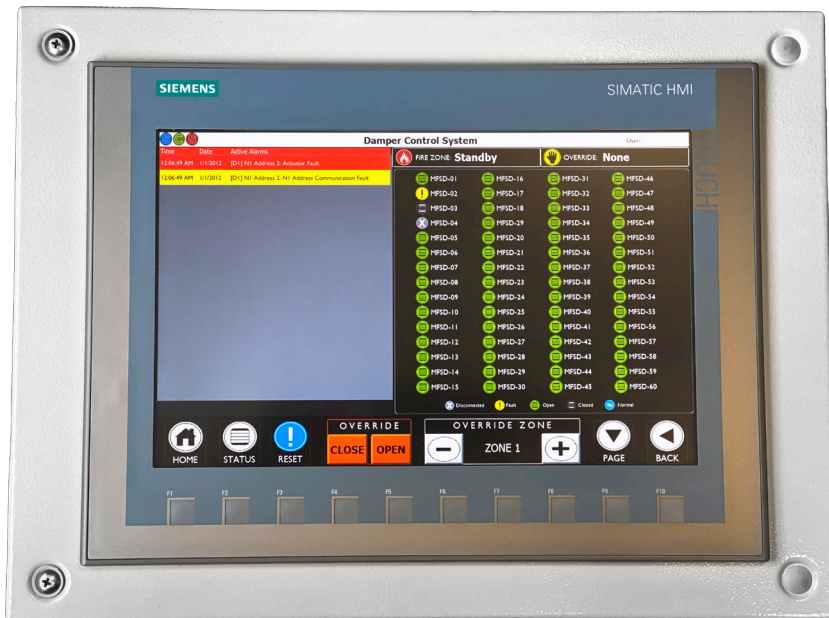

MAINTENANCE

With testing and diagnostic features the panel becomes an essential tool for service and preventative maintenance activities.

HISTORICAL LOG

All events and alarms are logged with historical viewing (up to 10,000). The system strategy can be programmed via the user-friendly graphical interface including set-up and operation of daily ventilation modes.

SECURITY

Password protection prevents unauthorised operation in normal conditions and is automatically removed in the event of a fire.

CONFORMITY

UKCA & CE Marked to Low voltage and EMC Regulations & Directives


KEY INFO / SPECIFICATIONS

IP Rating	IP54 (Indoor use only)
Max Current Load	500mA
Voltage Input	24V DC / 230V AC
Operating Temperature	0 to +40°C ambient temperature
Finish	Mild steel, RAL 7035 light grey powder-coated finish
Dimensions	H:300mm x W:400mm x D:120mm
Weight	5kg

SUITABLE FOR:



TECHNICAL DRAWINGS

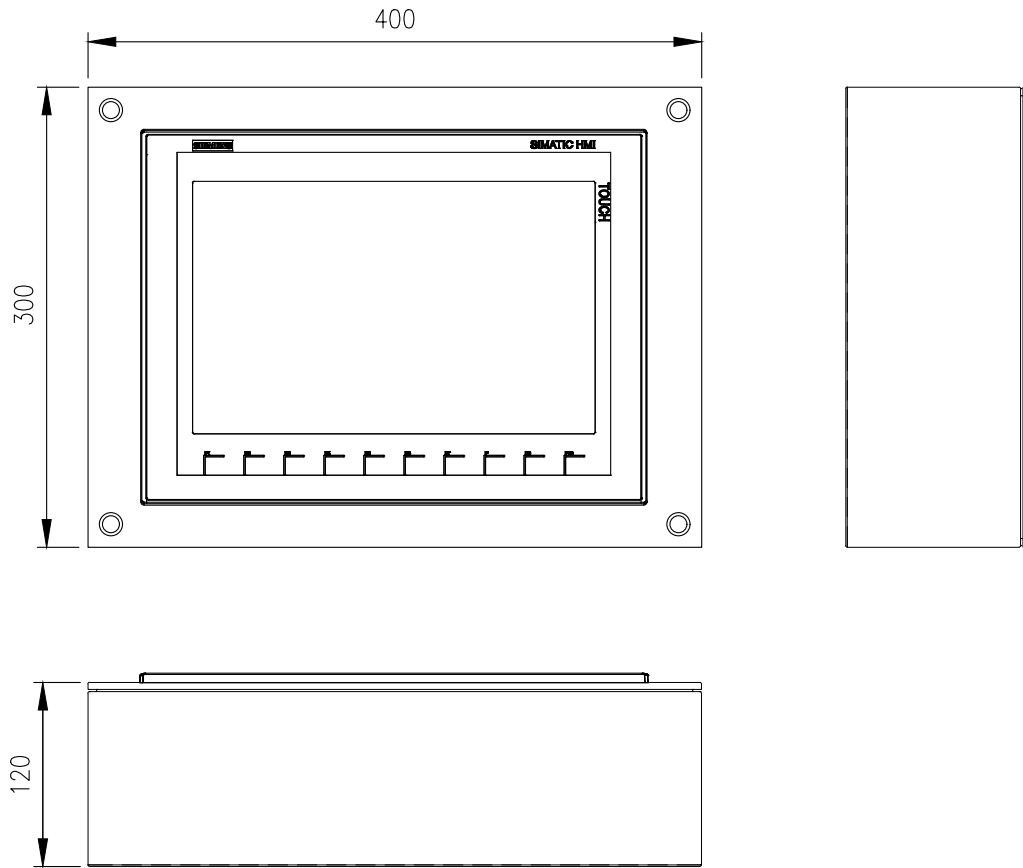

VARIATIONS

EV-HMI12 USER INTERFACE PANEL

Model number	Variations
EV-HMI12E-DC	Damper System Basic HMI panel, 12" Screen, Ethernet
EV-HMI12E-SS	Smoke Shaft System Basic HMI Panel, 12" Screen, Ethernet

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

Group SCS reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Group SCS to be a complete and up-to-date description. For further information visit www.groupscs.co.uk