

EV-ITS Temperature Sensor.

EV-ITS

The sensor acquires the room temperature via its sensing element whose resistance value changes as a function of the temperature.



DAILY VENTILATION

Suitable for use with most commercially available recessed conduit boxes.

ADJUSTABLE

Cables can be introduced from the rear (concealed wiring) or from below or above (surface-run wires) through knock-out openings.

MANUFACTURER

Siemens

COFORMITY




EN 60730-1

KEY INFO / SPECIFICATIONS

Cable Entries	Rear, Above or Below
IP Rating	IP30
Voltage input	24V AC
Voltage output	DC 0 - 10V
Operating temperature	-15°C to +50°C
Finish	ABS plastic RAL9003 white
Dimensions	H:100mm x W:90mm x D:36mm
Weight	0.13Kg

SUITABLE FOR:



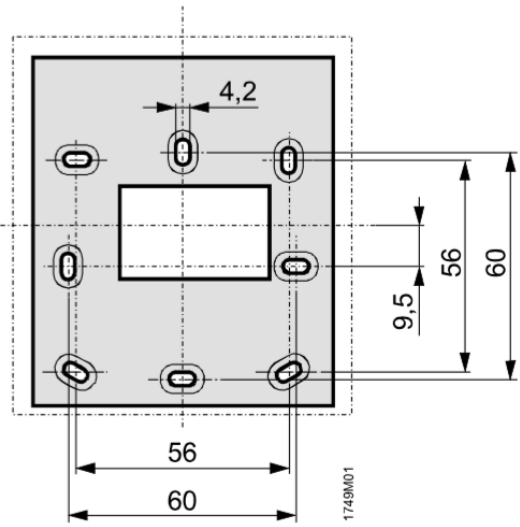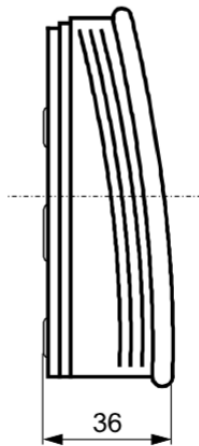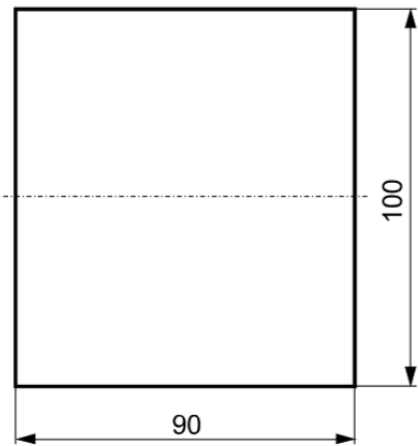

Drilling plan

Dimensions in mm

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

SCS Group reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by SCS Group to be a complete and up-to-date description. For further information visit www.groupscs.co.uk