


EV-IO Interface Panel.

EV-IO

The EV-IO is a remote digital input and output unit for the addressable EV-DCP main control panel range. Used to accept interface signals from third-party devices such as fire alarm systems and Building Management Systems, or to control ancillary equipment such as fans.

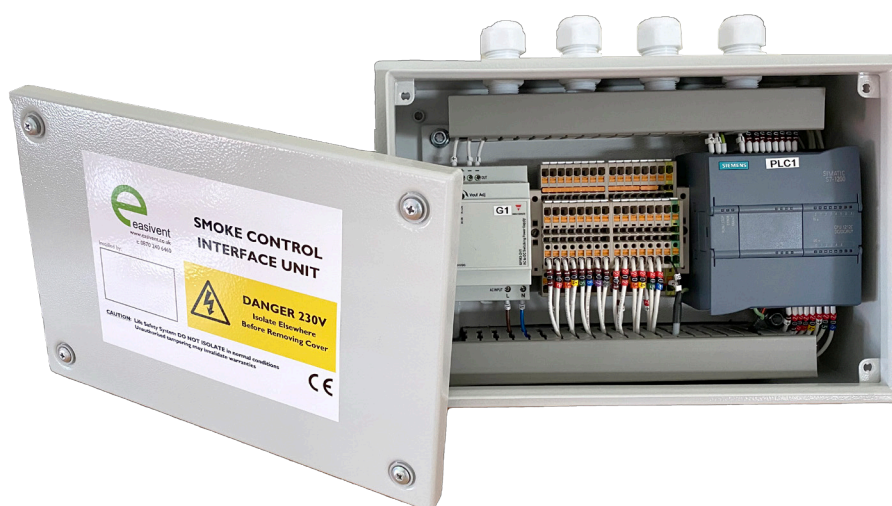

INPUTS AND OUTPUTS

Provides 8 inputs and 6 relay outputs for extended and complex cause & effect strategies. Expansion options available on request.

CONNECTIONS

Connects to the master panel as an addressable device on the EV-100 data network or directly by Ethernet.

CONFORMITY

UKCA & CE Marked to Low voltage and EMC Regulations & Directives

MANUFACTURER

Easivent

KEY INFO / SPECIFICATIONS

Cable Entries	Top
IP Rating	IP66
Voltage Input	230V AC 50Hz maintained
Operating Temperature	-5 to +50 °C ambient temperature
Finish	Mild steel, RAL 7035 light grey powder-coated finish
Dimensions	H:200mm x W:300mm x D:120mm
Weight	3kg

SUITABLE FOR:



MECHANICAL VENTILATION



MULTIZONE



NATURAL VENTILATION



BMS



SMOKE CONTROL



NETWORKING




DAILY VENTILATION



CAR PARKS

TECHNICAL DRAWINGS

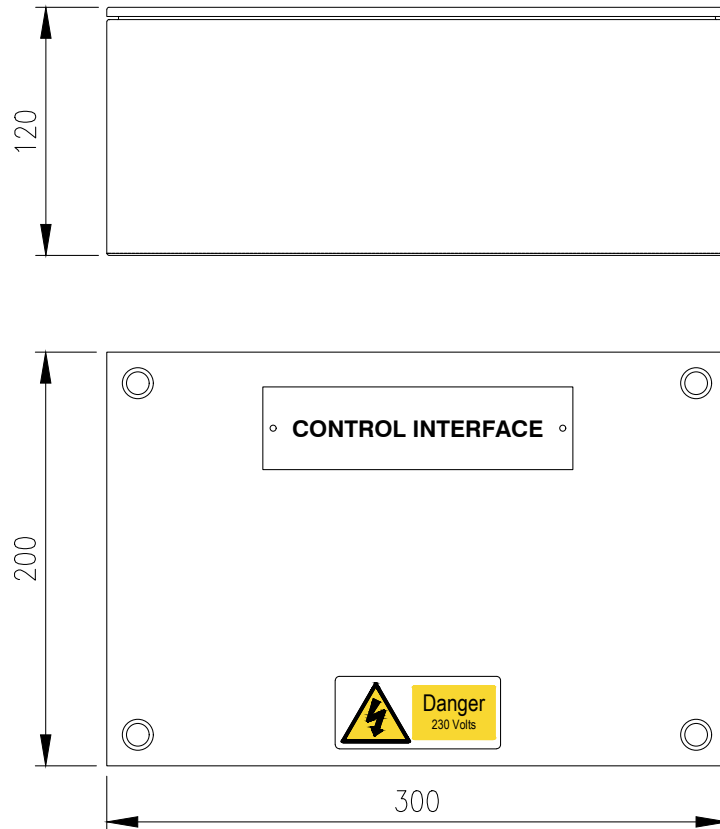

VARIATIONS

EV-IO INTERFACE PANEL

Model number	Variations
EV-IOD-8Q6	Interface panel, 8 Inputs / 6 Outputs, EV Data
EV-IOE-8Q6	Interface panel, 8 Inputs / 6 Outputs, Ethernet

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

Group SCS reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Group SCS to be a complete and up-to-date description. For further information visit www.groupscs.co.uk