

EV-HMI7B Basic User Interface Panel.

EV-HMI7B

The HMI7B user interface panel provides central monitoring and diagnostics for an EV-301 basic natural shaft system via a 7-inch colour touchscreen.



MAINTENANCE

With testing and diagnostic features the panel becomes an essential tool for service and preventative maintenance activities.

CUSTOMISATION

Events and alarms are logged with historical viewing. The system configuration can be set-up via the user-friendly graphical interface.

PROTECTION

Password protection prevents unauthorised tampering.

CONFORMITY

UKCA & CE Marked to Low voltage and EMC Regulations & Directives

MANUFACTURER

Easivent


KEY INFO / SPECIFICATIONS

Cable Entries	Bottom, Top or Rear
IP Rating	IP42 (indoor use only)
Max Current Load	250mA (AC), 500mA (DC)
Voltage Inputs	230V AC, 24V DC
Operating Temperature	0 to +40°C ambient temperature
Finish	ABS white gloss
Dimensions	Panel: H:240mm x W:296mm x D:120mm Flush cut-out: H:215mm x W:261mm x D:100mm
Weight	2.5kg

SUITABLE FOR:



TECHNICAL DRAWINGS

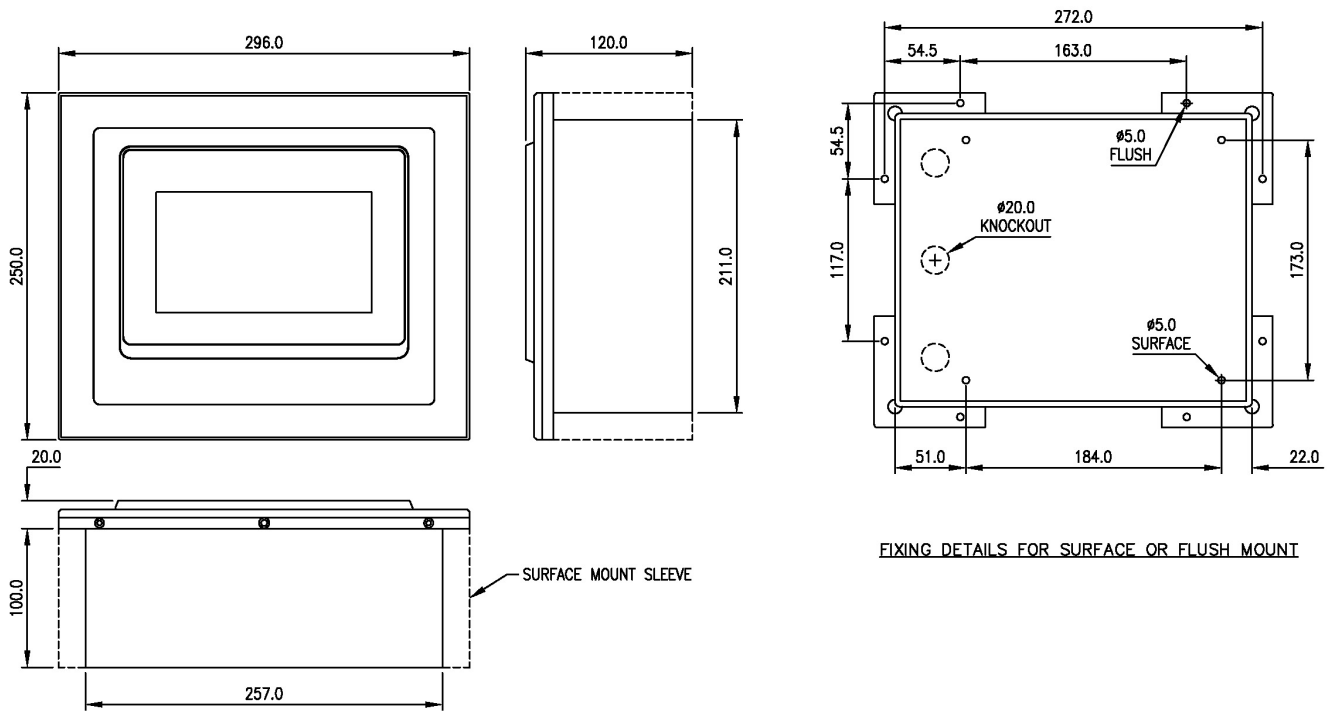

FIXING DETAILS FOR SURFACE OR FLUSH MOUNT

VARIATIONS

EV-HMI7

EV-HMI7B-SS Smoke Shaft Basic HMI panel, 7" Screen

ACCESSORIES

Part number	Product name
EV-HMI7-SLV	Surface Mount Sleeve

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

Group SCS reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Group SCS to be a complete and up-to-date description. For further information visit www.groupscs.co.uk