

EV-601 Interface Panel.

EV-601

The EV-601 interface panel monitors and controls smoke control ventilators and interface devices. With configurable modes it can operate as a standalone AOV control panel or as a natural shaft system or as part of a networked solution.



KEY INFO / SPECIFICATIONS

Cable Entries	Top rear
IP Rating	IP42
Max Current Load	Smoke vent output: 6.0A Back-up/ Daily vent output: 1.0A
Voltage Input	230VAC, 0.56A at full load, 40mA in standby
Voltage Output	Smoke vent - 24v DC reverse polarity Daily vent - 24v Power open/spring close
Operating Temperature	-5 to +40 °C ambient temperature
Finish	Metallic, powder-coated with white gloss finish
Dimensions	H:444mm x W:301mm x D:85mm
Weight	6.6kg (8.4kg with batteries)

BATTERY BACK-UP

Built-in BS EN 12101-10 compliant power supply and charger unit for optional battery back-up.

VERSATILE

Interfaces with smoke detectors, fire alarm interfaces, override switches and environmental sensors with line monitoring of all critical input /output cabling for faults and in compliance with prEN 12101-9 and ISO 21927-9.

CONNECTED

Addressable panel that communicates to a shaft control panel providing status and diagnostics features via the EV-HMI7 user interface.

CONFORMITY

CE Marked to low voltage and EMC directives BS EN 12101-10, prEN 12101-9, BS ISO 21927-9


MANUFACTURER

Easivent

SUITABLE FOR:



TECHNICAL DRAWINGS

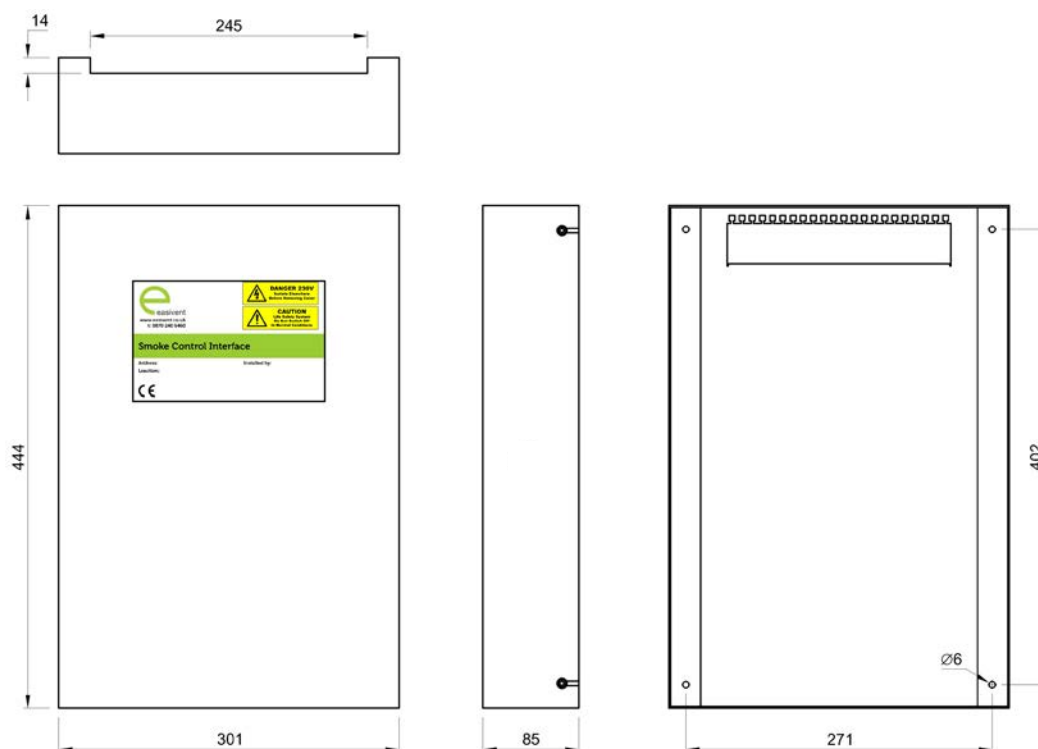

VARIATIONS

EV-601 INTERFACE PANEL			
Model Number	Description	Enclosure	Output
EV-601-MC	Smoke vent interface panel	Metal	24VDC 6.0A output
EV-601-MC-BB	Smoke vent interface panel	Metal	24VDC 6.0A output
EV-601-PC	Smoke vent interface panel	Plastic	24VDC 6.0A output
EV-601-PC-BB	Smoke vent interface panel	Plastic	24VDC 6.0A output

ACCESSORIES

Part number	Product name
EV-HE077	Override switch
EV-SD	Smoke detector
EV-ITH	Indoor thermostat
EV-RS	Rain sensor
EV-WRS	Wind and rain sensor

AVAILABLE AS PART OF AN INTELLIGENT NETWORK

EV-OTH	Outside thermostat
EV-ITS	Indoor temperature sensor
EV-OTS	Outdoor temperature sensor

SPARE PARTS

Part number	Product name
EV-601	Replacement control board
EV-301/601-BATTERY	Battery pack with connector
ST410148	Battery connector
EV-301/601-SPARES	Spares pack containing: 1 supply fuse 1 motor fuse 3 EOL resistors 2 motor EOL diodes

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

Group SCS reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Group SCS to be a complete and up-to-date description. For further information visit www.groupscs.co.uk