

Simon/Sico Link software and token loading.

To use SICO LINK, you need the USB-110 connection cable, the latest software and tokens. The same applies to SIMON LINK, except that you need the SIMON LINK software and the USB-300 connection cable.

Both software and USB drivers can be downloaded free of charge from <https://sico.simon-protec.com/>.

The old licence is no longer available, now everything is handled via tokens. If you still have a valid old licence, you can of course use it until it expires.

To use the software, you have to load the connection cable with tokens. The tokens are stored on the cable and can be used on any of PC / laptop. So you are no longer tied to one device because of the software, but can use it on any number of devices as long as the cable has tokens.

As soon as you connect the cable to the software for the first time, 2 tokens are debited, otherwise you cannot do anything. With these 2 tokens that have been debited, you can use the read function for a whole year and read out all the data. After these 365 days, 2 tokens are debited again as soon as the cable is connected to the software.

To be able to parameterise, you have to activate the function. Depending on how much time you need, there are various options for setting parameters:

- 1 hour = 1 token
- 2 hours = 2 tokens
- 8 hours = 5 tokens

As soon as you have activated the parameterisation function, the set time runs and cannot be paused. During this time, any number of parameterisations can be carried out on any number of units.

It is also possible to use tokens to carry out firmware upgrades for which a charge is made, such as activating the synchro function, analogue and priority function in M-SHEVs and a few more. Not all functions are available here yet. What is available and how many tokens are needed can be seen in the software.

When you buy a connection cable, 4 tokens are automatically included. If you need more tokens, you can order them from us at any time. The orders for tokens are processed very quickly. After we receive the order, we create credit codes for the number of tokens ordered and then send it by email. This code can be entered in the software after connecting the cable, and then the tokens are credited and stored on the cable. So to recharge tokens, you need the cable, the software and an internet connection.


The tokens are linked to the serial number of the cable and cannot be transferred to other cables.



An internet connection is required.


Upon downloading the software, you will be presented with this popup.

Please note you can't change the language to English until the next screen.

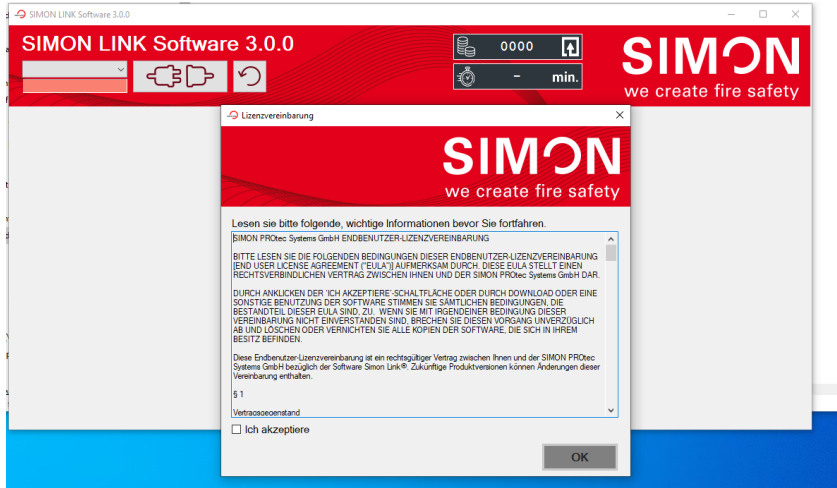

Check the box in the bottom left hand corner and then OK.


See below.

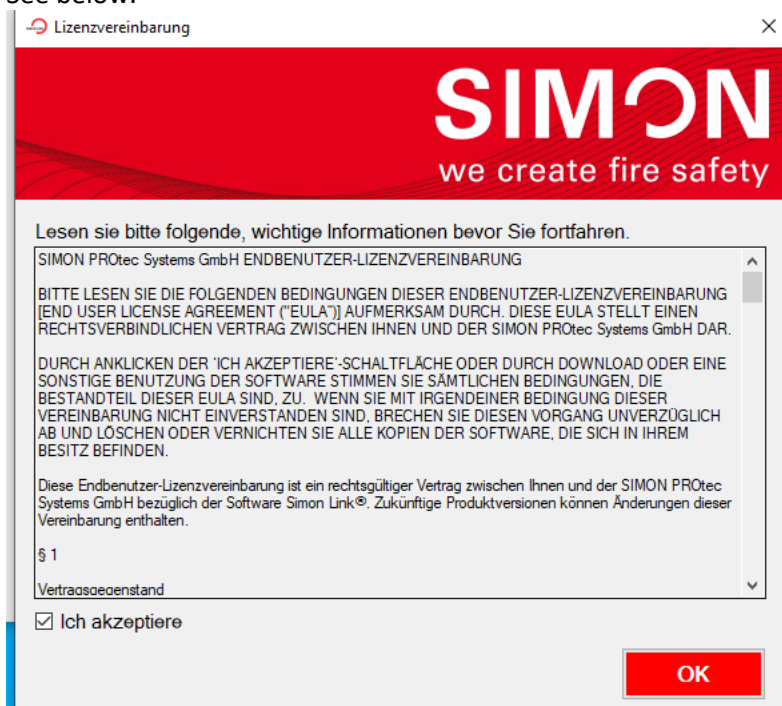

This is the main control panel screen.  
The user language can now be changed to English.



Connect your Simon Link cable to your machine.  
Select tokens at the top of the page.  
Enter your token number in the box that has popped up.

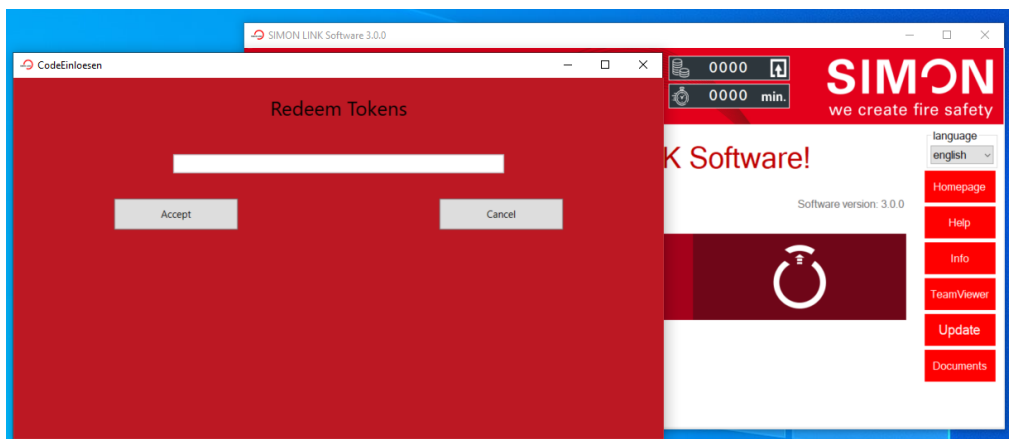

You can now select how many tokens you want to assign to the lead you have connected.

