

EV-HE077 Fireman's Override Switch.

EV-HE077

The switch provides local override control of the smoke vent and head of stair vent with visual and audible indication in accordance to BS EN 12101 Part 9 and BS ISO 21927 Part 9.



HOW IT WORKS

Two buttons provide override open, close and reset functions and three coloured LEDs with an audible buzzer indicate system health, fault and alarm status.

LOCATION

The override switch is located in the stairwell adjacent to the lobby fireman's entrance and is wired directly to the interface panel.

CASING

The hinged door is secured by a common key lock to prevent tampering and has a frangible break-glass element for emergency use.

MANUFACTURER

Simon Protec

COFORMITY

BS EN 12101-9/
BS ISO 21927-9



KEY INFO / SPECIFICATIONS

Connection	3 Wire to interface panel
Dimensions	H:125mm x W:125mm x D:35mm
Finish	ABS plastic RAL 2011 orange
IP Rating	IP42
Supply	24VDC, 32mA
Weight	0.25Kg

SUITABLE FOR:



TECHNICAL DRAWINGS

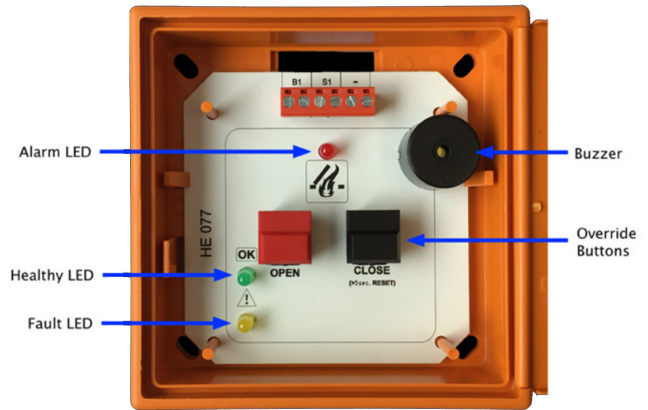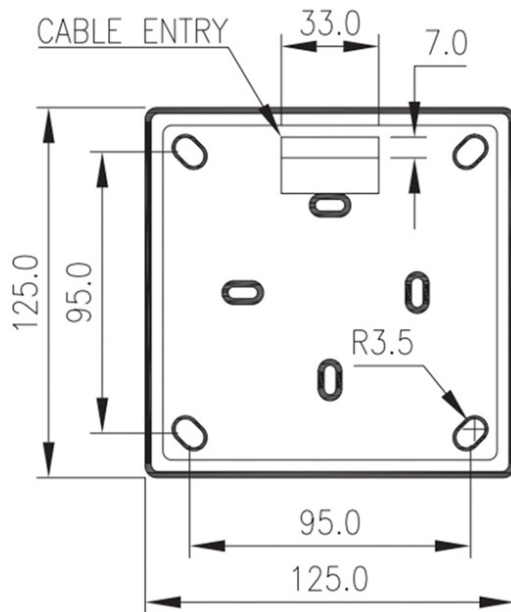

ACCESSORIES

Part number	Product name
EV-HE077	Override switch orange

SPARE PARTS

Part number	Product name
E10014	Replacement break-glass pane
E10019	Spare key

ATTENTION: Under the Construction Products Regulations (CPR) it is a legal requirement to use only certified products for smoke ventilation. It is the responsibility of the installer to ensure installations meet the relevant standards.

SCS Group reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by SCS Group to be a complete and up-to-date description. For further information visit www.groupscs.co.uk